

# PT-100 Temperature Control Relay



<b>Cat. No.</b>	<b>47A3D412</b>
<b>Parameters</b>	
Supply Voltage	24V to 240V AC/ DC ( ±15%)
Supply Frequency	50/60Hz
Power Consumption(Max)	For AC <5 VA For DC approx. 1W
<b>Device Characteristics</b>	
Max Lead Resistance Compensated in 3 wire Pt-100 Sensor	10 Ohm per Lead
Max Error in 2 wire Sensor	2.6°C per Ohm
Temperature Trip Accuracy	±1°C
Temperature Drift	Max 0.05°C/°C
Temperature Ranges	-50°C to 50°C, 0°C to 100°C, 100°C to 200°C, 200°C to 300°C
Set Point	0%-20%-40%-60%-80%-100%
Hysteresis	2%-5%-8%-11%-14%-17%-20%
Sensor Fault	Open and Short (Relay OFF)
Sensor Fault Detection Time	<500 ms
Sensor Fault Recovery Time	1.8 to 2 sec.
<b>Output Characteristics</b>	
Contact Arrangement	1 C/O
Contact Ratings	10A @ 250VAC / 30VDC, 4KV Isolation between Coil & Contact.
Utilization Category	AC-15: 3A/250VAC
Response Time(Trip Delay)	min 600 ms to 1 sec
<b>Analog Output Details</b>	
Measured Point (Y1)	(0-10) VDC ± 200 mV
Set Point (Y2)	(0-10) VDC ± 100 mV
In case of sensor Fault (Open/Short) Measured Point output (Y1) is 12VDC.	
<b>Ambient Conditions</b>	
Operating Temperature	-10°C to +55°C
Storage Temperature	-15°C to +60°C
Relative Humidity	5 to 85% RH(non-condensation)
Degree of Protection	IP 20 for terminals & IP 40 for Enclosure
Max. Altitude	2000 m
Pollution Degree	II
Type of Insulation	Reinforced
Certification	

## EMI/EMC Compliance

Harmonic Current Emission	IEC 61000-3-2	Class A
ESD	IEC 61000-4-2	Level II
Radiated Susceptibility	IEC 61000-4-3	Level III
EFT on Supply	IEC 61000-4-4	Level IV
EFT on I/P & O/P signal	IEC 61000-4-4	Level II
Surge	IEC 61000-4-5	Level IV
Conducted Susceptibility	IEC 61000-4-6	Level III
Voltage Dips & Interruptions (AC model)	IEC 61000-4-11	
Voltage Dips (DC model)	IEC 61000-4-29	
Conducted Emission	CISPR 14-1	Class A
Radiated Emission	CISPR 14-1	Class A


## Safety Compliance:

Dielectric test voltage between I/P & O/P	IEC 60947-5-1	3.75kV
Impulse Voltage between I/P & O/P	IEC 60947-5-1	4kV
Single Fault Test	IEC 61010-1	
Insulation Resistance	UL 508	>50K ohm
Leakage Current	UL 508	<3.5mA

## Environmental Compliance:

Cold Heat	IEC 60068-2-1	
Dry Heat	IEC 60068-2-2	
Vibration	IEC 60068-2-6	(10-55) Hz
Non-Repetative Shock	IEC 60068-2-27	30g, 15ms

## Connection Diagram

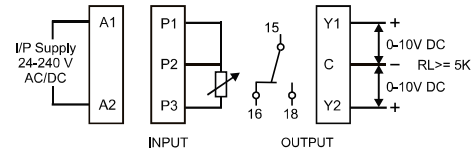

## Function Diagram

