

IPS-CE – PANEL MOUNT SLOPING SOCKET



DESCRIPTION / APPLICATION

Industrial plugs and sockets meet the international IEC 60309 Standard for the industrial sector and are available as mobile or for panel or wall mounting.

MAIN TECHNICAL DATA

ELECTRICAL FEATURES	Standard		IEC60309-1, IEC60309-2
	Rated current	A	16, 32,63,125
	Poles		2P+E, 3P+E, 3P+N+E
	AC Volts	V	220-250V~, 380-415V~, 220-380V/240-415V~
	Rated frequency	Hz	50/60
Mechanical Features	Degree of protection		IP44 or IP67
Installation	Ambient temperature	°C	-25 °C / +40 °C
	Terminal connection type		Screw terminals
	Mounting		Panel mounting




PART NUMBER EXAMPLE

BASE NUMBER	PRODUCT TYPE	CURRENT	POLES	PROTECTION
IPS-CE	6	1	3	2
EXAMPLE	IPS-CE-613			
	IPS-CE-6132			

(Blank) = IP44

2 = IP67

DIMENSIONS

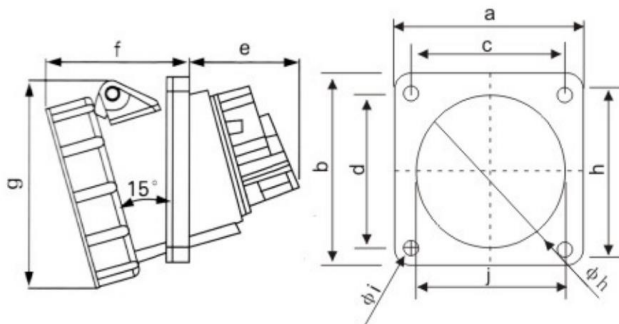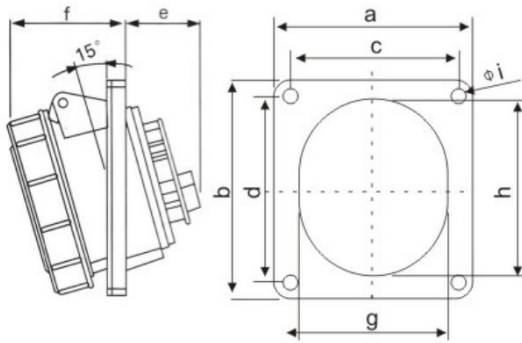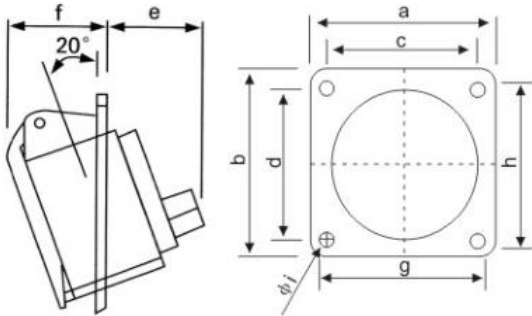

Part Number	413	414	415	423	424	425
Ampere	16 A			32 A		
Poles	3	4	5	3	4	5
a	62	76	76	80	80	80
b	68	86	86	97	97	97
c	47	60	60	60	60	60
d	48	61	61	71	71	71
e	36	45	45	51	51	51
f	37	37	37	50	50	52
g	50	56	65	65	65	70
h	55	62	72	75	75	80
i	5.5	5.5	5.5	5.5	5.5	5.5
Connection type	Screw terminal					
Wire flexible [mm ²]	1-2.5			2.5-6		

Part Number	4132	4142	4152	4232	4242	4252
Ampere	16 A			32 A		
Poles	3	4	5	3	4	5
a	76	76	76	80	80	80
b	86	86	86	97	97	97
c	60	60	60	60	60	60
d	61	61	61	71	71	71
e	36	36	36	51	51	51
f	37	37	37	50	50	52
g	50	50	50	65	65	65
h	55	55	55	75	75	75
i	6	6	6	6	6	6
Connection type	Screw terminal					
Wire flexible [mm ²]	1-2.5			2.5-6		

Part Number	4332	4342	4352	4432	4442	4452
Ampere	63 A			125 A		
Poles	3	4	5	3	4	5
a	100	100	100	120	120	120
b	112	112	112	130	130	130
c	80	80	80	100	100	100
d	88	88	88	108	108	108
e	64	64	64	92	92	92
f	80	80	80	77	77	77
g	119	119	119	128	128	128
h	92	92	92	102	102	10
i	7	7	7	8	8	8
j	82	82	82	92	92	92
Connection type	Frame contact					
Wire flexible [mm ²]	6-16			16-50		