



# DC Motor 3V little water pump

stand type/ lying type /water and land type

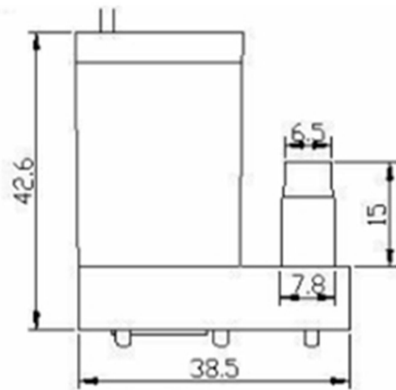


PRODUCT DETAILS:							
Model	Voltage	Current	Power	Water-lift	Flow	Start voltage	Waterproof level
JT-DC3L-3	3V	0.12	0.36	0.35	80	1	IP68
JT-DC3L-4.5	4.5V	0.18	0.91	0.55	100	1	IP68

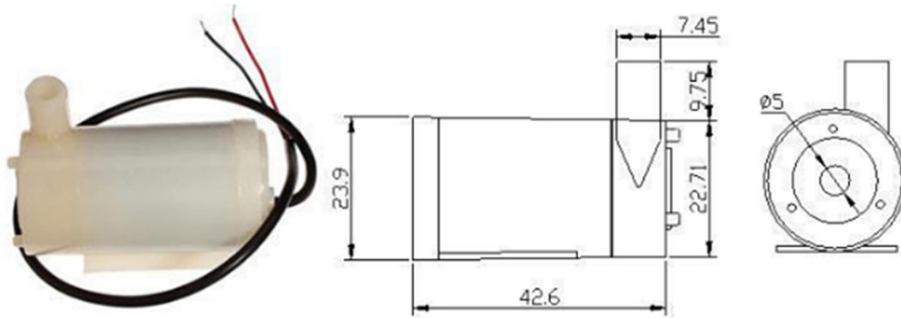


单位: MM

## Characteristic Curves

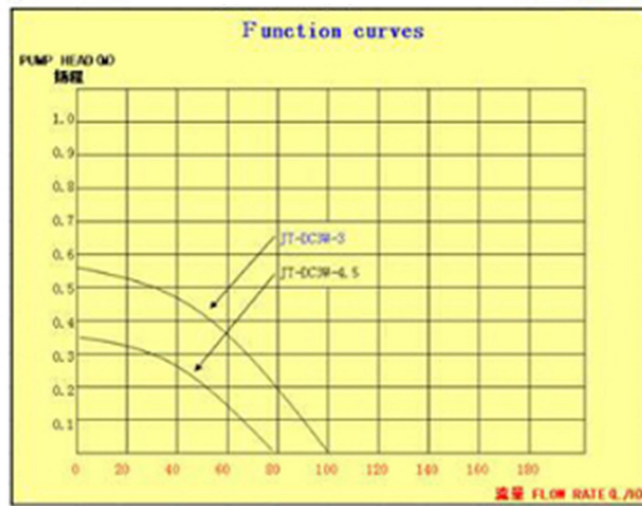

### Using method

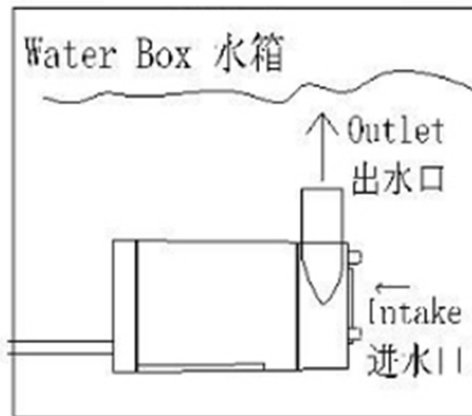

#### Connect instruction:

- 1.Red wire: Motor's positive
- 2.Black wire: Motor's negative
- 3.Water pipe: Suitable for water pipe which inner diameter is 6mm

#### Use instruction:

Aiming at air to say, absolute humidity value means that 1 stere air can include how much water quality. Due to the dissolution of water is uneven in the soil, so that this index cannot be measured in the soil and has no discussion value.

Soil humidity sensor module can measure humidity generally and according to humidity to decide the watering device's switch. Sensitivity can be adjusted by potentiometer generally.

#### Matters for attention:

- 1.Little water pump which red wire is positive, black wire is negative, it can't be connected reverse, otherwise water will suck back.
- 2.Water pump is brush motor, it is not suitable to run in air.