


Modular AC Contactor ACH



MAIN TECHNICAL DATA

Model No.	CO-ACH8-100/22						
In AC-7a	16A	20A	25A	32A	40A	63A	100A
In AC-7b	6A	7A	9A	12A	18A	25A	
VAC(50/60Hz)	24 110 230			24 110 230			24 110 230
Contact	4NO 2NO+2NC 4NC 3NO+1NC			4NC 2NO+2NC 4NO 3NO+1NC			4NO
Width(9mm*NO of pole)	4			6			12

DIMENSIONS

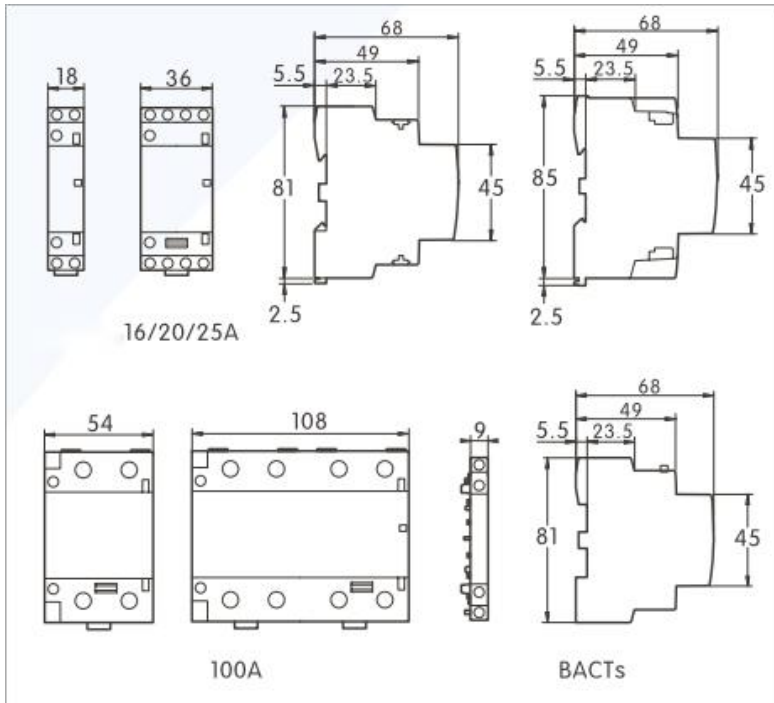

POWER CONSUMPTION

	In		VAC (50/60Hz)	Power consumption		Max power
	AC-7a	AC-7b		Maintain	Attraction	
1P	25A	9A	230...240	2.7VA	9.2VA	1.2W
	16A	6A	230...240	2.7VA	9.2VA	1.2W
2P	20A	7A	230...240	2.7VA	9.2VA	1.2W
	25A	9A	24	3.8VA	15VA	1.3W
			230...240	2.7VA	9.2VA	1.2W
			230...240	2.7VA	9.2VA	1.2W
	40A	18A	220...240	4.6VA	34VA	1.6W
	63A	25A	220...240	4.6VA	34VA	1.6W
3P	100A	—	220...240	6.5VA	53VA	2.1W
	25A	9A	220...240	4.6VA	34VA	1.6W
	40A	18A	220...240	6.5VA	53VA	2.1W
4P	63A	25A	220...240	6.5VA	53VA	2.1W
			220...240	4.6VA	34VA	1.6W
			24	4.6VA	34VA	1.6W
			220...240	4.6VA	34VA	1.6W
			24	4.6VA	34VA	1.6W
			220...240	4.6VA	34VA	1.6W
	32A	12A	220...240	6.5VA	53VA	2.1W
	40A	18A	220...240	6.5VA	53VA	2.1W
	63A	25A	220...240	6.5VA	53VA	2.1W
			220...240	6.5VA	53VA	2.1W
			220...240	6.5VA	53VA	2.1W
			220...240	6.5VA	53VA	2.1W
	100A	—	220...240	13VA	106VA	4.2W