
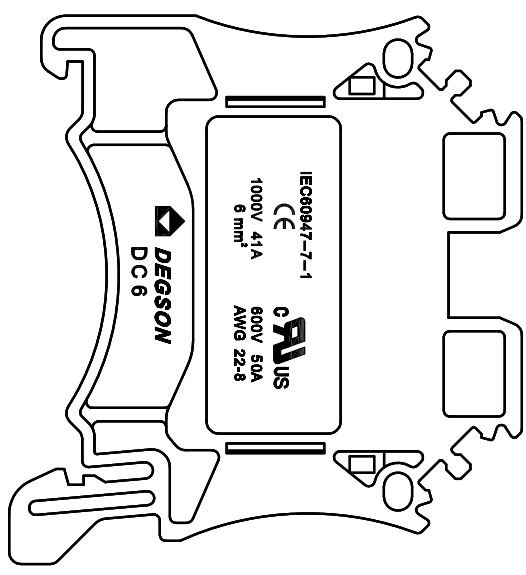

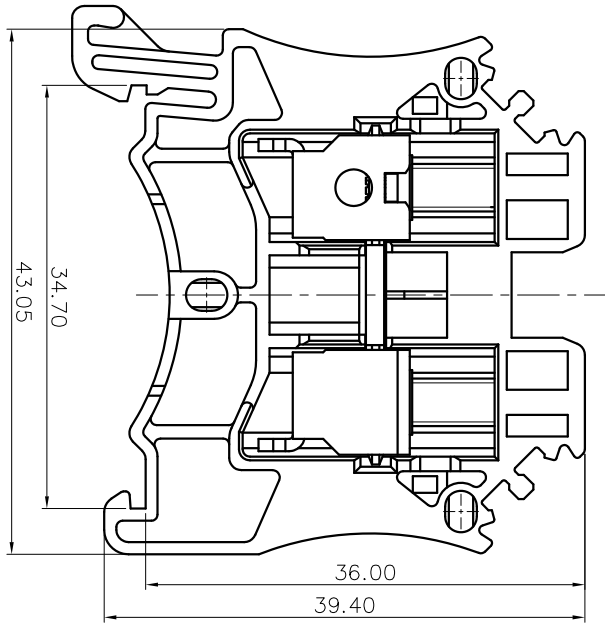


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

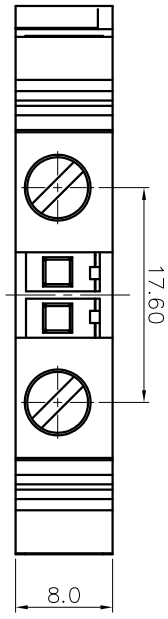

- NOTES1:  
UL Standard  
1. Rated voltage/current : 600V / 50A  
2. Withstanding voltage : AC2200V/1Min.  
3. Torque value : M4 , 10.53Lb.in  
4. Wire range : 22~8AWG
- IEC Standard  
1. Pollution degree : 3  
Rate voltage category : III  
Rate impulse voltage(KV) : 8KV  
Rate voltage(V) : 1000V  
Rate current(A) : 41A
2. Torque value : M4 , 1.2N·m  
3. Wire range : 0.5~6mm<sup>2</sup>

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 8.0mm, Poles : N=01P
- Stripping length : 10~12mm
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch Range	Nominal Dimension Range					
	mm	In	mm	In	mm	In
Over	6	10	30	60	100	150
TO	10	24	30	60	100	150
±	±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
						±2°

6:RoHS Compliance

DC6 - 01P - 1Y - 00A (H)  
(RoHS)  
00A - (Standard)  
(Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
2. (Blue)  
3. (Black)  
4. (Green)  
5. (Orange)  
6. (Red)  
7. (Transparent)  
8. (Yellow)  
9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DESSON ELECTRICAL CO., LTD
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

DESSON  
NINGBO DESSON ELECTRICAL CO., LTD  
宁波高松电子有限公司

DC6-01P-1Y-00A(H)

