

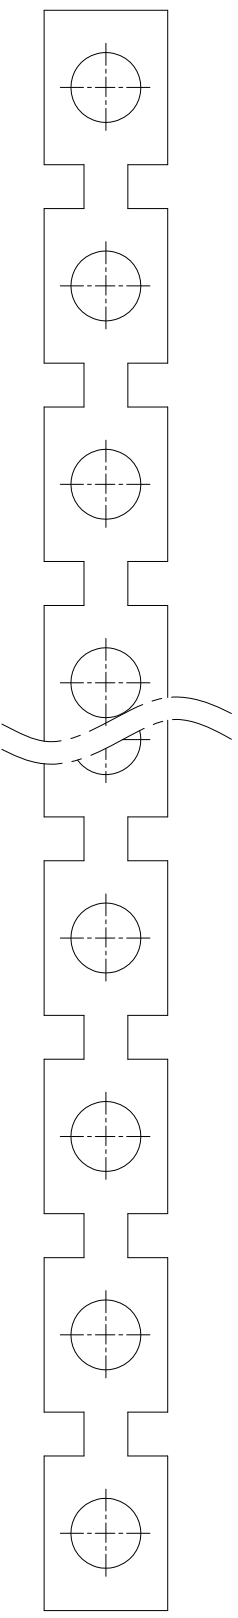
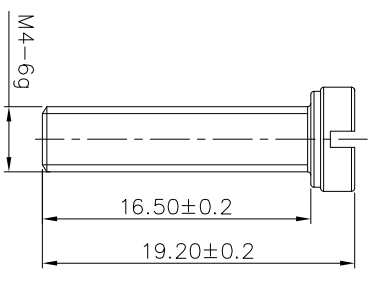


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



$$12.2 \times (N-1) + 9.5$$

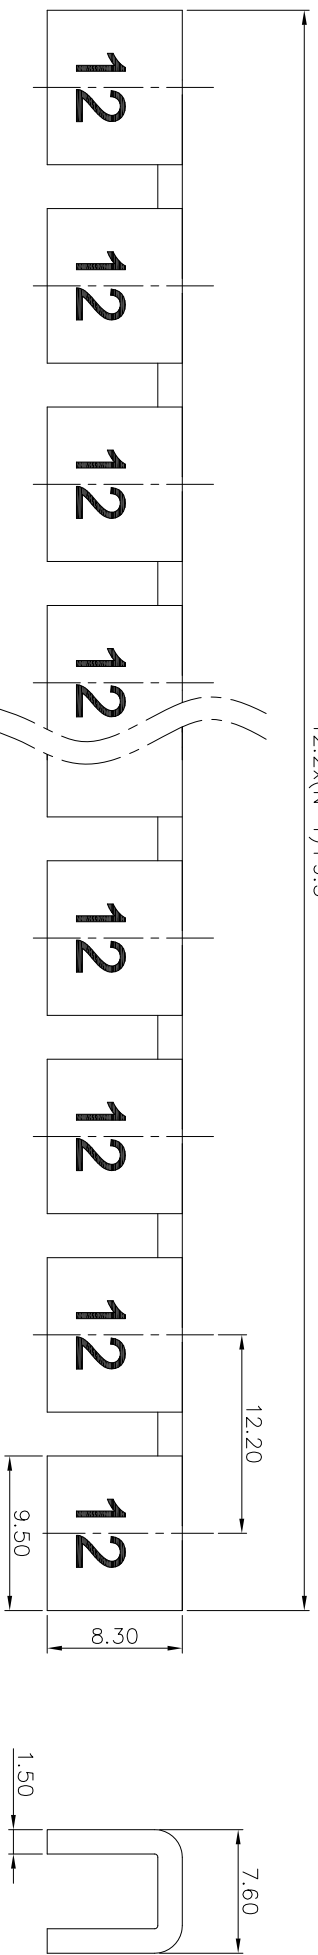

NOTES1:

UL Standard

1. Torque value : M4 , 10.53Lb.in

IEC Standard

1. Torque value : M4 , 1.2N·m

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 12.2mm, Poles : 02~10P

3. Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	in mm	Over	Under
6	TO	6	TO	6	0.1	0.10
10	TO	10	TO	10	0.15	0.10
24	TO	24	TO	24	0.20	0.15
30	TO	30	TO	30	0.25	0.20
60	TO	60	TO	60	0.30	0.25
100	TO	100	TO	100	0.40	0.30
150	TO	150	TO	150	0.50	0.40
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±2°	±2°	±2°	±2°	±2°	±2°	±2°

4. RoHS Compliance

FBI XX - 12
(Series No.) (Poles) (Pitch)

Current carrier and screws should be packed individually, which must be put in the same box

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	SCALE
REV	DO
1/1	1/1
1:1	1:1

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

FBIXX-12