

Moulded Case Circuit Breaker Disconnecter Switch Series ADM1-630SI



DESCRIPTION / APPLICATION

The moulded case circuit breaker will provide protection for the circuit and equipment in case of overload, short circuit and under voltage condition occurred in the power distribution circuit. Besides, it can also provide protection of overload, short circuit and under voltage for the non-frequent start of motor.


For the disconnecter switch series are mainly used for non-frequent circuit making or breaking circuit in the distribution network.

MAIN TECHNICAL DATA


Electrical Features	Standard		IEC60947-3
	Frame size rated current	A	630A
	Poles	P	3, 4
	AC Volts	V	415/690
	Rated insulation voltage	V	800
	Rated impulsive withstand voltage	KV	8
	Rated frequency	Hz	50/60
	Installation method		fixed type; plug-in type

DIMENSIONS AND MOUNTING

Plug type/Front-plate wiring(3P)

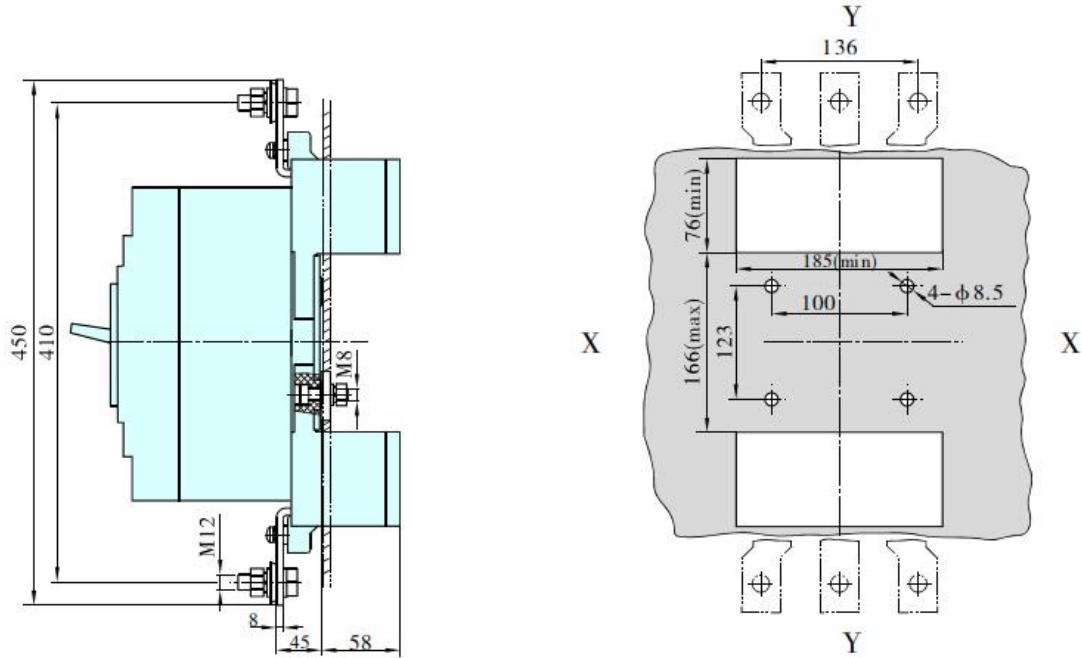

Plug type/Back-plate wiring(3P/4P)

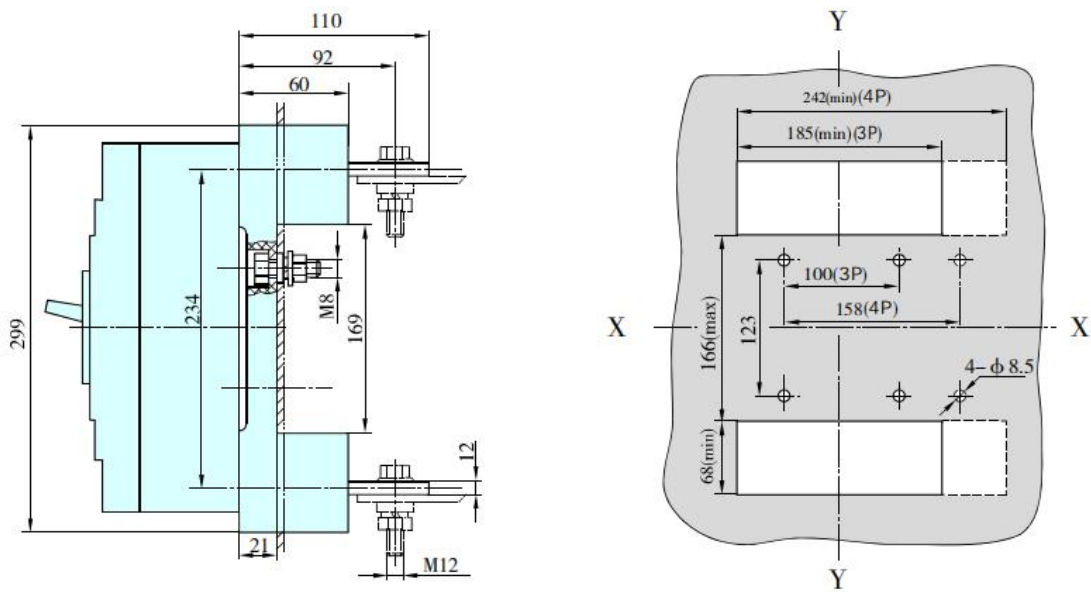

Draw-out type wiring(3P/4P)

