

Pilot Light DIN MOUNT




MAIN TECHNICAL DATA

Rated Operational Voltage	240VAC, 100VAC, 48V AC/DC, 24V AC/DC
Frequency	AC50~60Hz
Color	Red/green/yellow/blue/ etc
Type	single light, 2 lights, 3 lights
Connection Terminal	Pillar terminal with clamp
Housing	PA66 flame retardation
Max Power	0.9W
Illumination	LED
Mounting	On 35mm DIN rail


PART NUMBER EXAMPLE

BASE NUMBER	Poles	Color	Voltage
PL	1P	B/Y/G/R	230V
EXAMPLE	PL-1P-RED-230V (230V AC, Single Phase Indicator, homochromy (Red/Yellow/Green optional) 18mm, 50/60Hz)		

DIMENSIONS AND MOUNTING

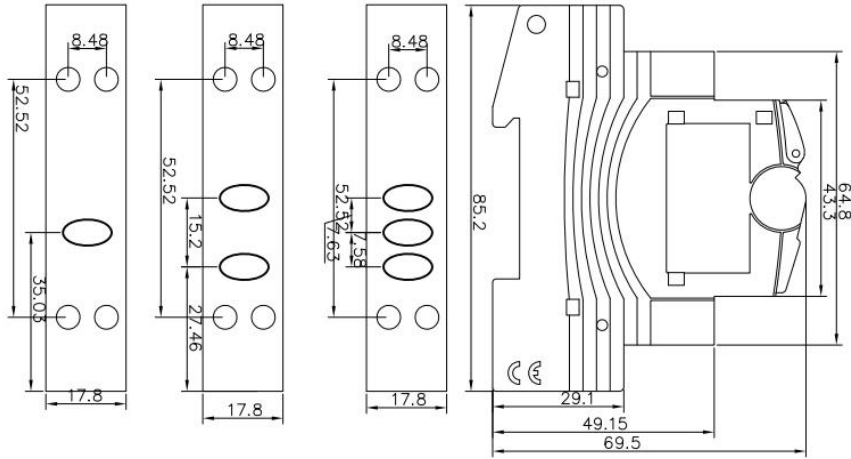

single light



three light