


Material	ABS Plastic			
Operating Temperature	-30° C to + 90° C			
Glow Wire Capability / Flammability	650° / UL94 HB (Flammable)			
Expected UV Life (Direct Exposure)	2-3 Years (6 Years - Indirect exposure)			
IP Level	IP55			
Security Level	1	2	3	4



Part Number	Description	H (mm)	W (mm)	D (mm)	Qty per box
FEP-0014	ABS Enclosure - Standard Grey Lid	100	100	70	80
FEP-0016	ABS Enclosure - Standard Grey Lid	100	100	90	60
FEP-0015	ABS Enclosure - Standard Transparent Lid	100	100	70	80
FEP-0017	ABS Enclosure - Standard Transparent Lid	100	100	90	60

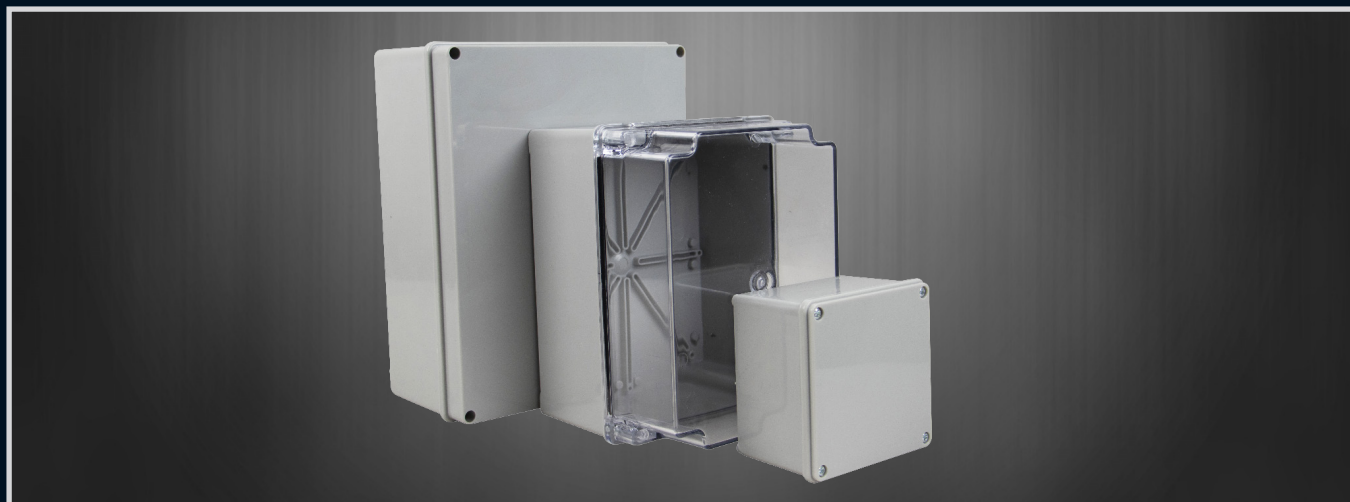

Part Number	Description	H (mm)	W (mm)	D (mm)	Qty per box
FEP-0022	ABS Enclosure - Standard Grey Lid	190	140	90	20
FEP-0024	ABS Enclosure - Deep Grey Lid	190	140	135	16
FEP-0023	ABS Enclosure - Standard Transparent Lid	190	140	90	20
FEP-0025	ABS Enclosure - Deep Transparent Lid	190	140	135	16



Part Number	Description	H (mm)	W (mm)	D (mm)	Qty per box
FEP-0026	ABS Enclosure - Standard Grey Lid	240	190	100	10
FEP-0028	ABS Enclosure - Deep Grey Lid	240	190	155	4
FEP-0027	ABS Enclosure - Standard Transparent Lid	240	190	100	10

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators

Transformer Equipment

Index