

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 20A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M3 , 4.43lb.in
- 4. Wire range : 24~12AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8KV
Rate voltage(V)	800V
Rate current(A)	24A


- 2. Torque value : M3 , 0.5N.m
- 3. Wire range : 0.2~2.5mm²

NOTES2:




- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 6.2mm; Poles : N=01P
- 3. Stripping length : 6~7mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch Range	In mm		Nominal Dimension		Range	
	Over	To	Over	To	Over	To
6	10	10	30	60	100	150
	10	24	30	60	100	150
±0.15; ±0.20; ±0.30; ±0.30; ±0.50; ±0.70; ±1.00; ±1.30 ±2*						

6. RoHS Compliance

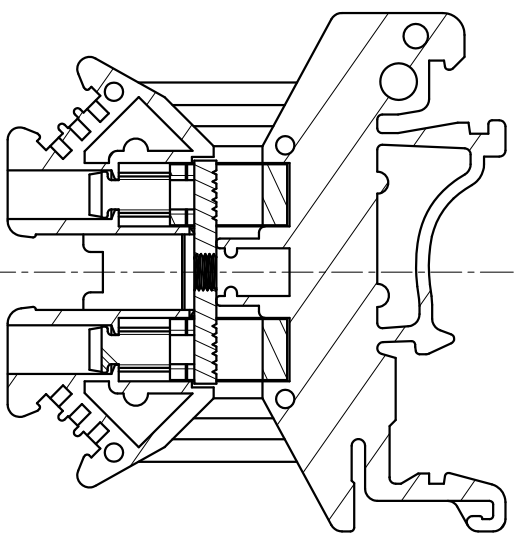

PC2.5B - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

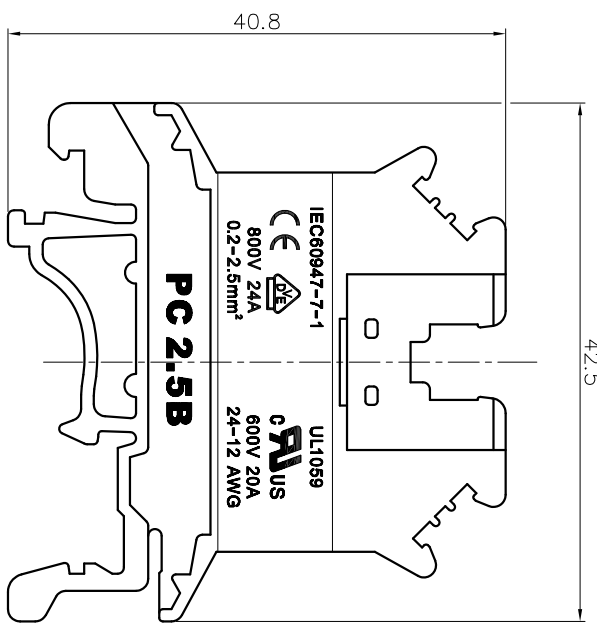

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1

PC2.5B-01P-1Y-00A(H)

