





SL7N-125D

Pole	1P, 2P, 3P ,4P
Rated current In(A)	6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A, 80A, 100A,125A
Rated voltage Ue(M)	1P(DC440V, DC600V), 2P(DC800V, DC1000V), 3P(DC1200V, DC1500V); 4P(DC1500V)
Current	6A、 10A、 16A、 20A、 25A、 32A、 40A、 50A、 63A
Rated ultimate short circuit breaking capacity(Icu)	5kA/1500V
Running breaking capacity(Ics)	5kA/1500V
Mechanical life	10000
Electrical life	2000Times
Certificate	CB CE 
Rated impulse withstand voltage(Uimp)	8kV
Overoltage category	III
Class of pollution	3
Ingress protection	IP40; terminal IP20
Resistance to heat and humidity	Class 2
Relative humidity	≤95%
Installation	din
Relative humidity	+50°C not more than 95%
Wiring polarity requirements	NO
Working temperature	-40°C -+75°C

Continues...

Product dimensions

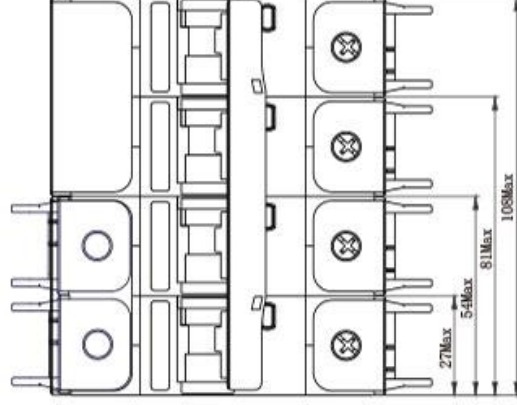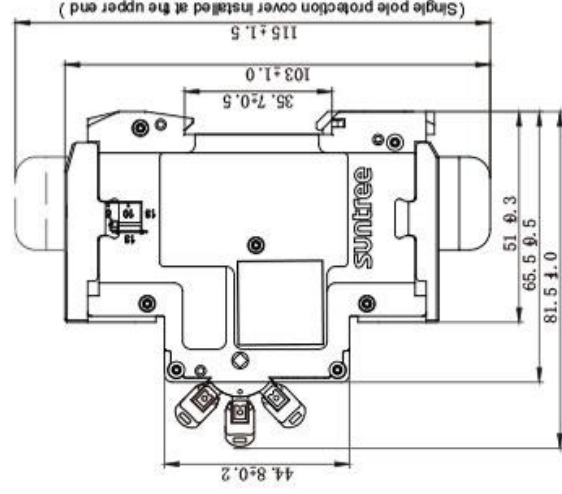

Shunt auxiliary

MX7+OF7
Us: DC12-48V
1A-2A

